

Modern HydroTap Deck Mount BC Arc Faucet

Style Number: 833475

**Collection: HydroTap** 


**Origin: Australia** 

Description: HydroTap Deck Mount Boiling & Chilled Filtered Faucet Brushed Gold 120V

## **GENERAL FEATURES & SPECIFICATIONS**


- Deck Mounted Arc Filtered Faucet w/ Boiling & Chilled
- For Residential Applications
- · Boiling Water Safety Lock, Cool Touch Tap
- Smart Energy Saving Mode
- Hole Size: 1-3/8"
- Flow Rate: Max 1.8gpm
- Water Pressure: Min 30psi-Max 75psi, Min Flow 1gpm
- Water connection: 1/2" BSP Isolation Valve Required within 3' of installation
- Integral Water Valves: Fitted with a Dual Check Valve and 50psi Pressure Limiting Valve
- Water Supply Requirements: Potable Drinking Water
- TDS: Min 50ppm max 120ppm
- Integral Water Filter: 0.2 Micron, 1 Size Replace every 1500 gallons or 12 months
- Power Rating: 110-120V, 60Hz, 1.18kW
- Power Supply: 110-120V, 60Hz 15amp power supply with NEMA 5-15 Outlet
- Dimension: 13.4" x 18.1" x 13.1"
- Min Air Gap: Clearances are required 2" Left Side, 2" Right Side, 8" Above
- Approvals: WQA NSF/ANSI 372, 42, 53, cUL, CEC
- Available Finishes: Bright Chrome, Brushed Chrome, Matte Black, Rose Gold, Brushed Gold, Polished Nickel or Brushed Nickel




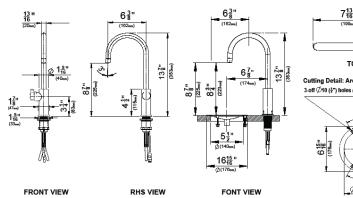




Cutting Detail: Arc/Cube & Stand-Alone Font 3-off Ø10 (‡") holes @ 155mm (6 ‡") PCD equispaced





DETAIL B: CABINET FLOOR CUT-OUT



We cannot guarantee the accuracy of this information. Dimensions are nominal - for guidance only and are not to be used for pre-installation.

For further information call 312.832.9000 or visit us at hydrologychicago.com